


Articulated feet, sanitizable

(base in stainless steel)

Part. **109** \varnothing **120**

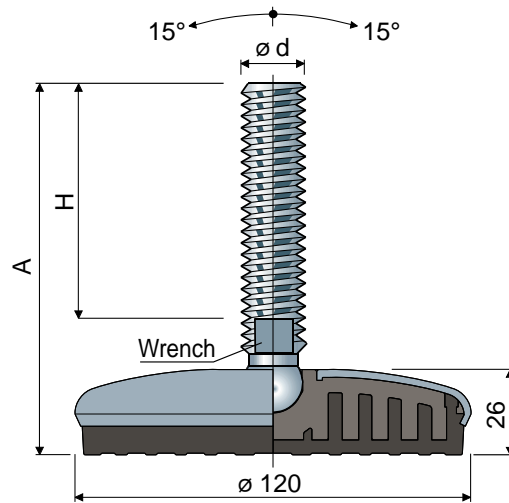

Spindle measures in mm				Spindle and base in stainless steel AISI 304	Max static load (N)
$\varnothing d$	A	H	Wrench		
M16x2	103	60	13	109 / 83558	25000
	133	90	13	109 / 83559	
	148	105	13	109 / 83560	
	168	125	13	109 / 83561	
	198	155	13	109 / 83562	
	208	165	13	109 / 83563	
M20x2,5	248	205	13	109 / 83564	27000
	132	86	17	109 / 83565	
	162	116	17	109 / 83566	
	187	141	17	109 / 83567	
	207	161	17	109 / 88859 NEW	
M24x3	244	198	17	109 / 83568	29000
	142	96	19	109 / 83569	
	168	122	19	109 / 83570	
	198	152	19	109 / 83571	
M30x3,5	228	182	19	109 / 83572	31000
	346	300	19	109 / 83573	
	191	144	24	109 / 86218	

Spindle measures in inches				Spindle and base in stainless steel AISI 304	Max static load (N)
$\varnothing d$	A	H	Wrench		
5/8" -11 UNC	8,70"	7"	1/2"	109 / 83594	25000
3/4" -10 UNC	8,78"	7"	5/8"	109 / 83595	27000

Base material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of thermoplastic rubber 68 Shore black colour.

Box quantity: 8 pieces.

Features: Co-moulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

Washers UNI 6592-69 - Box quantity: 24 pieces.

$\varnothing M$	M16	M20	M24	M30
Smm	3	3	4	4
$\varnothing A$ mm	30	37	44	56
Stainless steel codes	7291	7292	7294	7296

Nuts UNI 5588-65 - Box quantity: 24 pieces.

$\varnothing d$	M16	M20	M24	M30
Smm	13	16	19	24
Ch. mm	24	30	36	46
Stainless steel codes	7277	7278	7280	7282

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths • stainless steel AISI 316.
- Anti-slip pads: White colour.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.