# Adjustable feet, sanitizable with side fixing system

(base in stainless steel)

## Part. 112 95x130

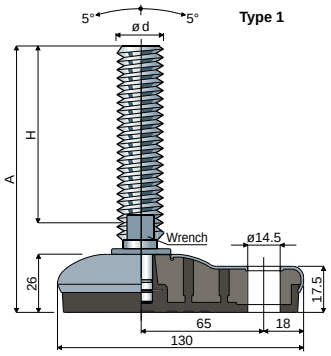


| Type 1 | | | | | | | |
|---|---|---|---|---|---|---|---|
| Spindle measures in mm | | | | Spindle and base in stainless steel AISI 304 | | | |
| ød | A | H | Wrench | Black anti-slip pad | White anti-slip pad | Blue Ral 5005 anti-slip pad | Max static load |
| | | | | Code | Code | Code | (N) |
| M12x1,75 | 110 | 70 | 19 | 112 / 83744 | 112 / 85928 | 112 / 88235 | 17000 |
| M14x2 | 148 | 108 | 12 | 112 / 83745 | 112 / 85929 | 112 / 88236 | |
| M16x2 | 102 | 58 | 13 | 112 / 83746 | 112 / 85930 | 112 / 88237 | |
| | 133 | 89 | 13 | 112 / 89337 | 112 / 89338 | 112 / 89339 | |
| | 163 | 119 | 13 | 112 / 83747 | 112 / 85931 | 112 / 88238 | |
| | 189 | 145 | 13 | 112 / 83748 | 112 / 85932 | 112 / 88239 | |
| | 245 | 201 | 13 | 112 / 83749 | 112 / 85933 | 112 / 88240 | |
| M18x2,5 | 201 | 157 | 15 | 112 / 83750 | 112 / 85934 | 112 / 88241 | |
| M20x2,5 | 135 | 89 | 17 | 112 / 87341 | 112 / 87342 | 112 / 88242 | |
| | 153 | 107 | 17 | 112 / 83751 | 112 / 85935 | 112 / 88243 | |
| | 182 | 136 | 17 | 112 / 83752 | 112 / 84222 | 112 / 88244 | 27000 |
| | 203 | 157 | 17 | 112 / 83753 | 112 / 85936 | 112 / 88245 | |
| | 236 | 190 | 17 | 112 / 83754 | 112 / 85937 | 112 / 88246 | |
| | 284 | 238 | 17 | 112 / 83755 | 112 / 85938 | 112 / 88247 | |
| M24x3 | 139 | 90 | 19 | 112 / 83756 | 112 / 85939 | 112 / 88248 | |
| | 176 | 127 | 19 | 112 / 83757 | 112 / 85940 | 112 / 88249 | |
| | 211 | 162 | 19 | 112 / 83758 | 112 / 85941 | 112 / 88250 | |
| | 251 | 202 | 19 | 112 / 83759 | 112 / 85942 | 112 / 88251 | |
| M30x3,5 | 174 | 125 | 24 | 112 / 83760 | 112 / 85943 | 112 / 88252 | |
| | 234 | 185 | 24 | 112 / 83761 | 112 / 84223 | 112 / 88253 | |

**Base material:** Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of thermoplastic rubber 68 Shore black, white or blue Ral 5005 colour.
**Features:** Co-moulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable. Feet with M12 spindle diameter are supplied with hexagonal adjustment for 19 mm. wrench.
**Box quantity:** 8 pieces.

**Washers** UNI 6592-69 - **Box quantity:** 24 pieces.




| ø M | M12 | M14 | M16 | M20 | M24 | M30 |
|---|---|---|---|---|---|---|
| Smm | 2,5 | 2,5 | 3 | 3 | 4 | 4 |
| ø A mm | 24 | 28 | 30 | 37 | 44 | 56 |
| Stainless steel codes | 7287 | 7288 | 7291 | 7292 | 7294 | 7296 |

**Nuts** UNI 5588-65 - **Box quantity:** 24 pieces.




| ø d | M12 | M14 | M16 | M20 | M24 | M30 |
|---|---|---|---|---|---|---|
| Smm | 10 | 11 | 13 | 16 | 19 | 24 |
| Ch. mm | 19 | 22 | 24 | 30 | 36 | 46 |
| Stainless steel codes | 7273 | 7274 | 7277 | 7278 | 7280 | 7282 |

On request
- **Spindles with:** Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths • stainless steel AISI 316.
- **Anti-slip pads:** In thermoplastic rubber 68 SHORE blue RAL 5005 FDA APPROVED.
- **Assembling of:** Nuts • washers.
- **Box quantity:** According to your request.

## Part. 112 95x130

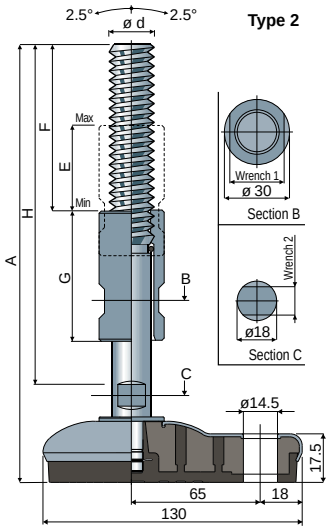


**Base material:** Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of thermoplastic rubber 68 Shore black, white or blue Ral 5005 colour.
**Features:** Co-moulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable. The threaded insert guarantees the protection of the spindle thread.
**Box quantity:** 8 pieces.

On request
- **Spindles with:** Stainless steel AISI 316.
- **Anti-slip pads:** In thermoplastic rubber 68 SHORE blue RAL 5005 FDA APPROVED.
- **Box quantity:** According to your request.

| Type 2 | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Spindle measures in mm | | | | | | | | Spindle and base in stainless steel AISI 304 | | | | |
| ød | A | H | F | E | G | Wrench 1 | Wrench 2 | Black anti-slip pad | White anti-slip pad | Blue Ral 5005 anti-slip pad | Max static load | |
| | | | | | | | | Code | Code | Code | (N) | |
| M16x2 | 200 | 159 | 73 | 39 | 60 | 22 | 12 | 112 / 88040 | 112 / 88042 | 112 / 88254 | | |
| | 260 | 220 | 100 | 78 | 100 | 22 | 12 | 112 / 88041 | 112 / 88043 | 112 / 88255 | | |
| M20x2,5 | 200 | 159 | 73 | 39 | 60 | 25 | 13 | 112 / 84135 | 112 / 85944 | 112 / 88256 | 27000 | |
| | 260 | 220 | 100 | 78 | 100 | 25 | 13 | 112 / 84193 | 112 / 85945 | 112 / 88257 | | |
| M24x3 | 200 | 159 | 73 | 39 | 60 | 30 | 17 | 112 / 88044 | 112 / 88046 | 112 / 88258 | | |
| | 260 | 220 | 100 | 78 | 100 | 30 | 17 | 112 / 88045 | 112 / 88047 | 112 / 88259 | | |